

Single-turn Buckle

Quick Setup




Single-turn Buckle

This buckle was intended for use in combination with inertia levels up to 0.070 kgm².
Any use of higher inertia levels may be done at your own discretion and risk.

Step 1

Select your working height by adjusting the slider up or down as usual. Hang the pulley block on the designated hook on the slider.



Step 2

Extend the belt out as far as possible, leaving no slack on both sides.



Step 3


Fold the lower belt at about 5 cm (2") from its extremity to create slack in the upper belt.



Single-turn Buckle

Step 4

Place the buckle with carabiner pointing downwards & push the folded belt through the bottom slot.

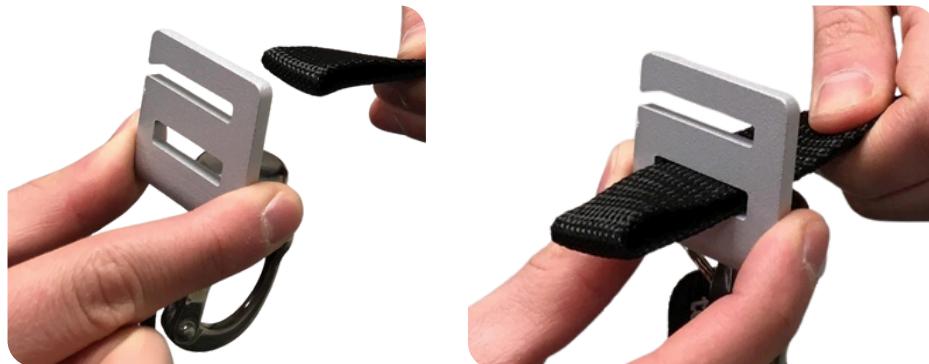

Step 5

Loop the belt around the top of the buckle and tighten it.

